


# DY

## Fixed Panel Air Filter

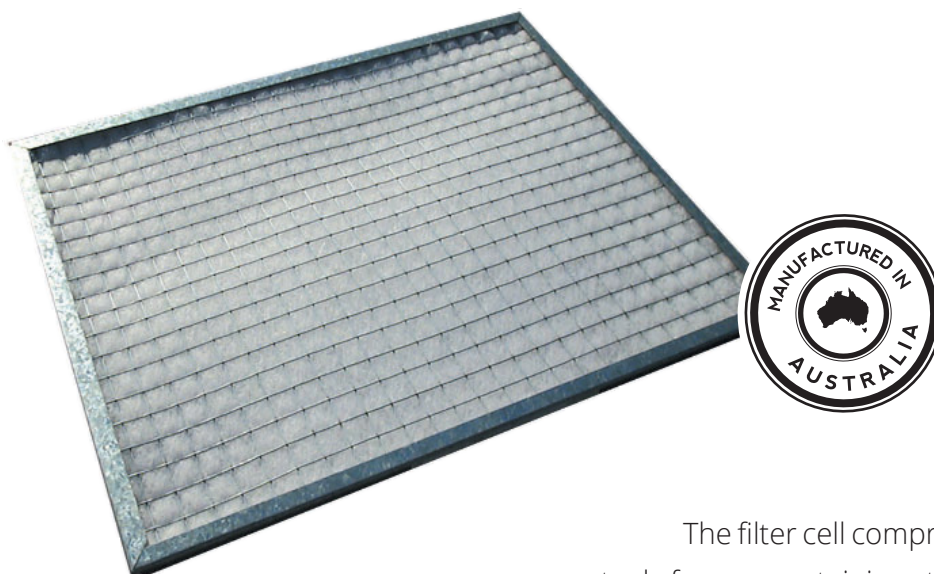

### Applications

The DY Filter is a fixed panel dry arrestance type unit (also available as gel-coated) suitable for use in most air conditioning and ventilation systems. It is also suitable for use as a prefilter in high efficiency air filtration systems and in light industrial applications.

DY filters can be easily made up into banks to suit any given air capacity by riveting the holding frames together.

The DY filter consists of two basic parts - the mounting frame and the filter cell. The mounting frame has provision for mounting in banks and incorporates spring clips. The frame is constructed of aluminium or galvabond steel and is fitted with a sealing strip to avoid air leakage when the filter cell is in place.

The filter cell comprises a galvanised steel frame containing the filter media held in place between two galvabond pieces of steel mesh. The filter media is manufactured from graded synthetic fibres laid up in graduated layers, bonded and subsequently baked.

### Standard Specification

Air filters shall be Email Air Handling DY or approved equal, surface area (see table), fitted with synthetic fibre filtering material requiring no adhesives.

At rated capacity, average efficiency by AS1324.2 test procedure shall be not less than (see table)%.

The filter shall withstand a minimum increase of 125Pa above initial resistance. The mounting frame shall be galvabond (or aluminium) to resist corrosion.




## Summary of test results

Tested sample: DGH20 flat media pad 20mm, 610 x 610mm face area

Tested to AS1324.2.4-5 - 2003: Air Filter Performance

<b>Initial Resistance</b>	72 Pa
<b>Initial Efficiency Number 1 Dust</b>	20%
<b>Average Efficiency Number 1 Dust</b>	27%
<b>Average Arrestance Number 4 Dust</b>	80%
<b>Dust Holding Capacity</b>	185g
<b>Dust Holding Capacity per unit of Face Area</b>	497 g/sqm

**Clean Filter Resistance Vs Air Flow**

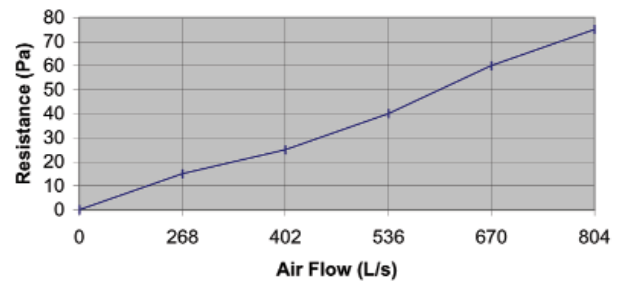

This is an extract from Test Report Reference RALC00401AE.

This test was conducted in a laboratory accredited by the National Association of Testing Authorities, Australia. Laboratory accreditation number 13213. For more information on Filter testing or to request a test report contact your nearest AES Environmental branch.

WIDTH	PART NO.	MEDIA SIZE RANGE	MEDIA TYPE	RATING AT 1.8m/s
25	MFFWMK25-009	0.00 - 0.09 m2	K	G2
	MFFWMK25-016	0.09 - 0.16 m2	K	G2
	MFFWMK25-025	0.16 - 0.25 m2	K	G2
	MFFWMK25-036	0.25 - 0.36 m2	K	G2
	MFFWMK25-049	0.36 - 0.49 m2	K	G2
	MFFDGH25-009	0.00 - 0.09 m2	H	G3
	MFFDGH25-016	0.09 - 0.16 m2	H	G3
	MFFDGH25-025	0.16 - 0.25 m2	H	G3
	MFFDGH25-036	0.25 - 0.36 m2	H	G3
	MFFDGH25-049	0.36 - 0.49 m2	H	G3

## How to order

1. Obtain media range requirements/filter sizes to suit your application i.e. L x W = m2
2. Refer to the table for nearest media range.
3. To order, quote part number from table and required filter face dimensions in mm.

**Note:** Maximum length for a single side on DY filters should not exceed 800mm. Minimum recommended length is 200mm. Mounting frames and hardware to suit DY Filters is available on request.

© 2018 AES Environmental | Bulletin No. 06J.02.17AES174REV4

*In keeping with our policy of continuing product improvement, we reserve the right to alter specifications without notice.*



9A Pembury Rd, Minto 2566  
 Ph 1300 550 116 F 1300 550 117  
 sales@aesenvironmental.com.au  
 www.aesenvironmental.com.au

